

STAGE BEAMER FC - INDOOR

05504

DESCRIPTION

Very powerful 14x5W RGBW OSRAM LED PROJECTOR for stage and architectural lighting.

FEATURES

- Extra "16 bit TOUR"-mode with 16 bit colormixing (R, G, B en W controlled by 2 channels : coarse and fine)
- DMX-input and output with 3p and 5p connectors
- Very powerful RGBW LED projector based on 14 quadri-color 5W OSRAM LEDs:
 - Unwanted RGBW shadows are completely eliminated
 - Perfect and evenly spread color mixing, even at short range.
 - Beam angle: 14°
- This LED projector is your first choice : To light up small, medium and large stages but also perfect for architectural lighting.
- Perfect alternative for traditional PAR64 projectors: only 65Watt power consumption at full output and no need for heavy dimmer packs!
- Different DMX operation modes: 4, 5, 6, 7, 9, 10 and 15ch
- Thanks to all kinds of special features this projector is the choice of professional light designers:
 - Color temperature presets 3200 K ~ 10.000 K
 - RGBW Calibration
 - Different dimmer curves
 - ID-addressing
 - Recall custom programs by DMX
 - Menu driven LED-display with password protection on the rear panel
 - Tempered glass lens protection
 - Special air-valve keeps humid outside: no condense inside the projector!
- The 1200Hz LED scan rate makes it also a perfect choice in TV studios (no interferences with TV-cameras)
- Completely silent: the projector is cooled by natural air convection so no noisy fans are needed!
- The lightweight aluminium housing uses a double hanging bracket so it can also be used as floor projector.




www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2017 by BEGLEC NV. All rights reserved.



SPECIFICATIONS

General : Application	Architectural, Stage & Rental, Theatre
General : Dimensions (cm)	24.5 x 20.5 x 24.5
General : Weight (kg)	4.96
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	65
General : Color	black
General : Display	LED
General : Fixation	M10
General : IP rating	indoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : SMART-DMX	No
Control : Standalone	automatic, fixed
Control : programmable	No
Control : upgradable software	No
Control : maximum DMX channels	15
Light : lamp socket	none
Light : lamp	LED
Light : colors	RGBW
Light : mix colors	Yes
Light : focus	No
Light : zoom	No
Light : iris	No
Light : min. refresh rate (kHz)	1.2
Light : max. refresh rate (kHz)	1.2
Connections : input	3 pin XLR, 5 pin XLR, powercon
Connections : output	3 pin XLR, 5 pin XLR, powercon
Brand	BRITEQ
EA NCode	5420025655040
Discontinued	No

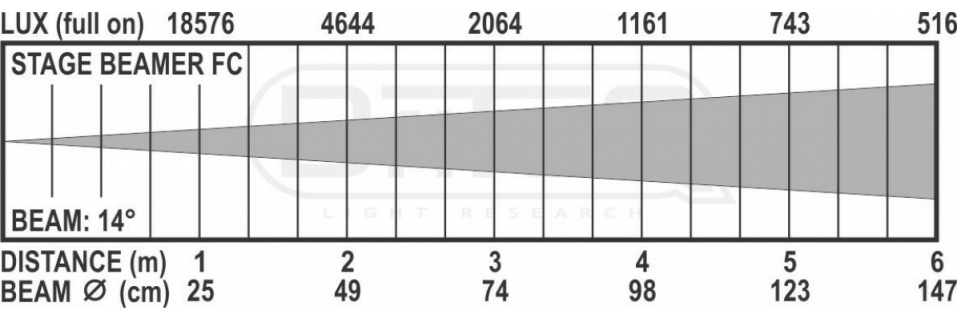

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2017 by BEGLEC NV. All rights reserved.