

BT-NONAPIXEL WHITE

B05532

DESCRIPTION

Extremely powerful and compact IP65 outdoor projector with very narrow white beam and nice RGB HALO-effects!

FEATURES

- Compact but extremely powerful very narrow white beam outdoor projector! (max 235'140lx @ 1m * 9'406lx @ 5m)
- Uses the same lens and custom 60W CW/WW LED as in our famous BT-NONABEAM!
- Tunable white: from warm white 3000K with high CRI to 6000K cold white.
- Different beam angles, thanks to included filters with magnetic installation frame:
 - 4° beam: perfect alternative for the old "halogen" ACL PAR-projectors!
 - 10° filter: wider but still concentrated beam
 - 45° filter: for use as regular white projector
- Nice HALO effects with 30 RGB pixels
- Many pre-programmed HALO-effects + FULL pixel control.
- Different DMX-modes:
 - 5CH mode: beam control without HALO-ring effects
 - 12CH mode: beam control with basic pre-programmed HALO-ring effects
 - 16CH mode: beam control with adjustable pre-programmed HALO-ring effects
 - 96CH mode: beam control with FULL pixel control to create your own HALO-ring effects
- IP65 rating for outdoor use!
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- Lockable OLED-display + backlit touch buttons for easy setup
- DMX-control channel (dimmer curves, dimmer speed, ...)
- 3pin DMX in/outputs and IP65-Power in/outputs for easy daisy chaining.
- Optional modification kit available to modify IP 3pin XLR to 5pin (BT-XLR3TO5 KIT - code: B05523)
- No Fan cooling: completely silent!







www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2021 by BEGLEC NV. All rights reserved.

TECHNICAL SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental
General : Series	No
General : Dimensions (cm)	see drawings
General : Weight (kg)	4.5
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	66
General : Color	black
General : Display	OLED
General : Fixation	optional standard clamp
General : IP rating	outdoor
Control : manual	No
Control : Master/Slave	No
Control : SMART-DMX	No
Control : Standalone	no
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	95
Light : lamp socket	none
Light : lamp	LED
Light : min. color temperature (K)	3000
Light : max. color temperature (K)	6000
Light : CRI	84
Light : colors	White, Cold white, Warm white, RGB
Light : mix colors	Yes
Light : functions	manual frost
Light : min. beam angle (°)	4
Light : max. beam angle (°)	45
Light : min. refresh rate (kHz)	3.6
Light : max. refresh rate (kHz)	3.6
Connections : input	3 pin XLR, Lockable Power Connector (Neutrik PowerCon® compatible)
Connections : output	3 pin XLR, Lockable Power Connector (Neutrik PowerCon® compatible)
Brand	BRITEQ
EANCode	5420025655323

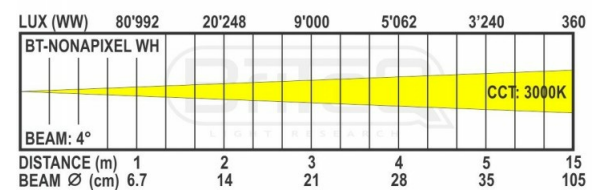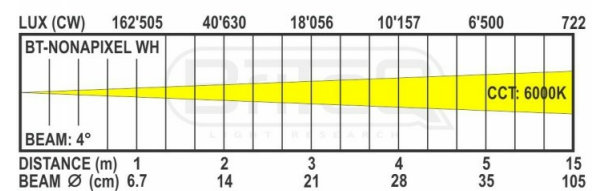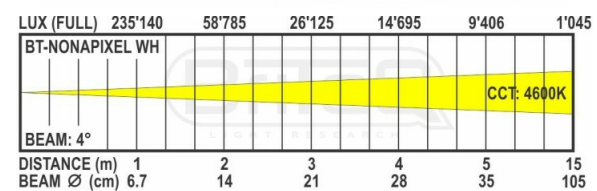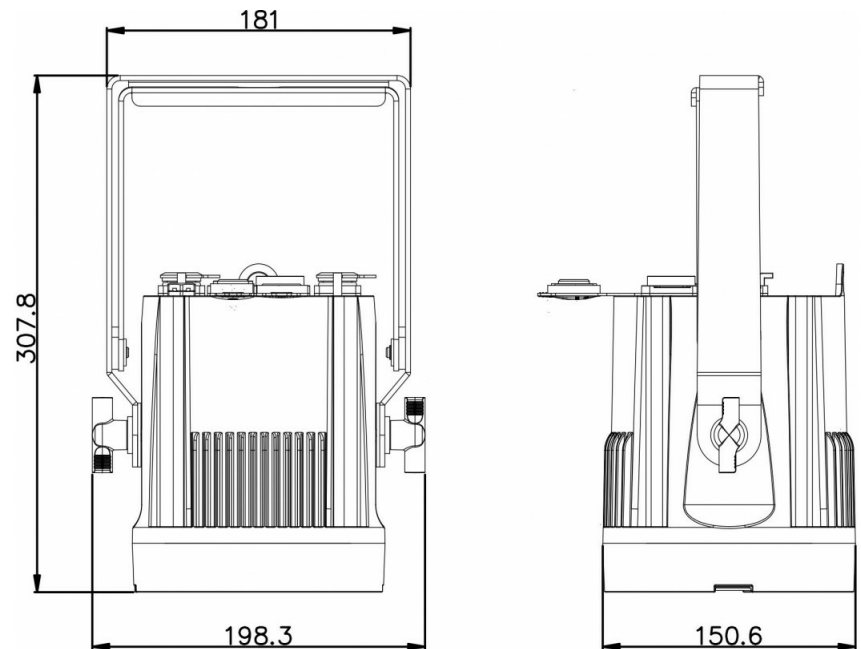

www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2021 by BEGLEC NV. All rights reserved.