

BT-SUNRAY 130R

B05525

DESCRIPTION

Waterproof 130W white COB projector (3000K, CRI>97) with amber drift effect! Super multifunctional: replaces halogen blinders, exhibition projectors, strobes, ...

FEATURES

- Powerful 130W white COB projector (3000K) with amber drift effect, behaves exactly like a halogen blinder!
- Rugged die-cast ALU-housing with waterproof IP65 rating!
- The fast exchange of different lenses makes this a super multifunctional projector for many applications:
 - **IP-BLINDER:** for outdoor stages: IP65 protection, special blinder lens, high output and amber drift, ...
 - **EXPO light:** easily exchangeable beam angles, very high CRI, removeable barndoors, ...
 - **LED STROBE:** high light output, super-fast and random strobe effects, ...
- Preprogrammed amber drift effect and/or separate control for white/amber!
- Tunable CCT: from 1700K to 3000K
- Very high CRI-factor (CRI: 97 – R9: 89) for perfect color rendering.
- 6 DMX-modes (1 to 7ch): 4 Blinder modes (8+16bit) + 2 EXPO light modes (DTW + white)
- Control channel with remote DMX-control for “red shift”, dimmer speed/curves, fan speed, ...
- Very high 16kHz LED refresh rate, perfect for HD-TV recording studios.
- RDM-function for: channel mode, DMX-address, temperature monitoring, ...
- LCD display with backlit touch buttons for easy configuration, even in the dark.
- Different accessories included:
 - **2 compound eye lenses with beam angles: 15° and 35°**
 - **1 blinder glass (authentic blinder look)**
 - **1 Gel frame (install optional CTO / CTB / COLOR filters)**
 - **1 Glare shield (anti-glare and better beam)**
- Optional Barndoor available (BT-BARN 4 RAY-series, code: B05527)
- Easy truss installation, thanks to the fixing points for “omega bracket small” (code: B02677)
- Double bracket for easy ground installation
- Easy daisy chaining: waterproof 3pin XLR + Neutrik® PowerCON TRUE1® in/out
- Optional modification kit available to modify IP 3pin XLR to 5pin (BT-XLR3TO5 KIT - code: B05523)
- 100V~240V 50/60Hz Power supply.
- **NOTE: this product has IP65 rating while used for non-permanent outdoor installation and under normal conditions (not exposed to seawater).**



BARNDOOR OPTIONAL







www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2020 by BEGLEC NV. All rights reserved.

TECHNICAL SPECIFICATIONS

General : Application	Commercial, Stage & Rental
General : Weight (kg)	5.3
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	130
General : Color	black
General : Display	LCD
General : Fixation	M12
General : IP rating	outdoor
Control : Modes	standalone, DMX
Control : manual	Yes
Control : Master/Slave	No
Control : SMART-DMX	No
Control : Standalone	fixed
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	7
Light : lamp socket	No
Light : Lux	1580 (5m)
Light : lumen	3500
Light : lamp	COB
Light : min. color temperature (K)	1700
Light : max. color temperature (K)	3000
Light : CRI	97
Light : colors	White, Warm white
Light : mix colors	No
Light : functions	manual zoom
Light : min. beam angle (°)	15
Light : max. beam angle (°)	35
Light : min. refresh rate (kHz)	16
Light : max. refresh rate (kHz)	16
Connections : input	3 pin XLR, PowerCon® TRUE1, rdm
Connections : output	3 pin XLR, PowerCon® TRUE1
Brand	BRITEQ
EANCode	5420025655255

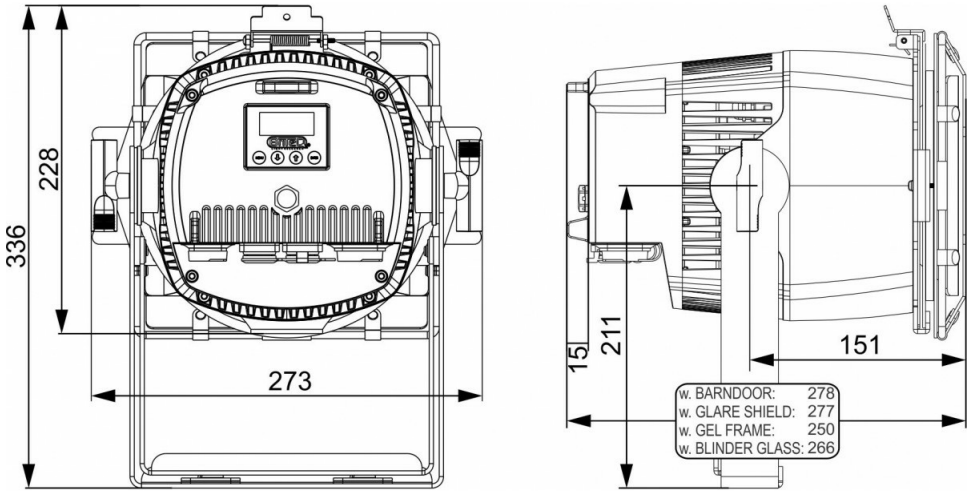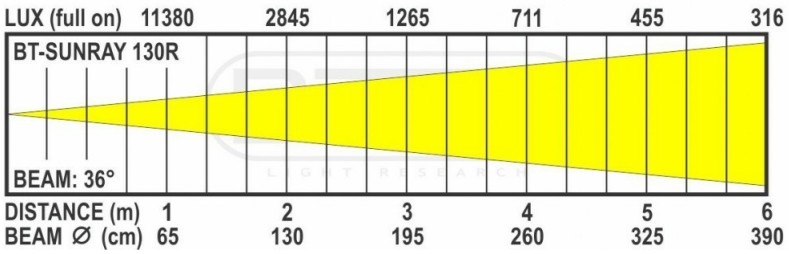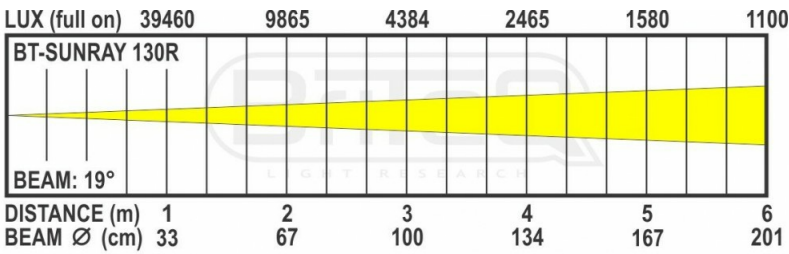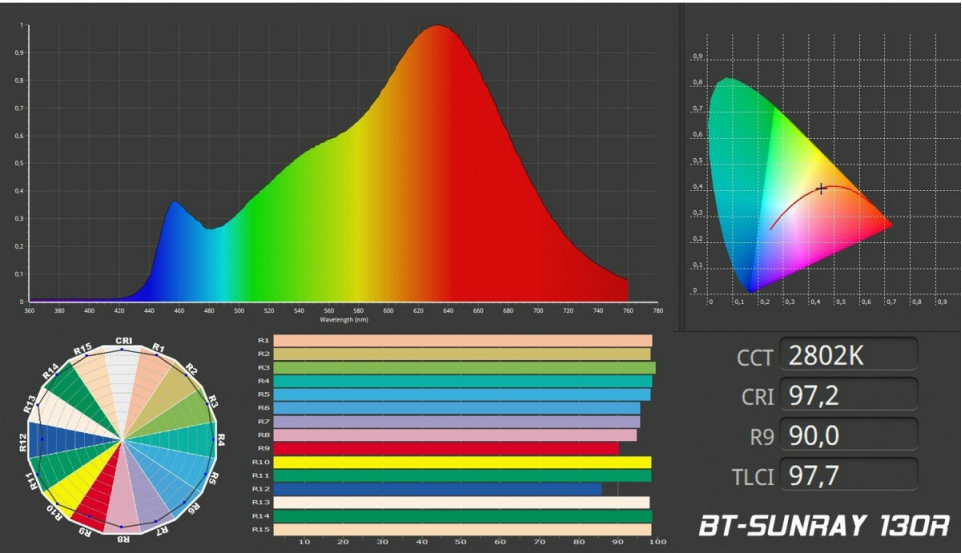

www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2020 by BEGLEC NV. All rights reserved.