


FHD PRO SDI Broadcast Monitor








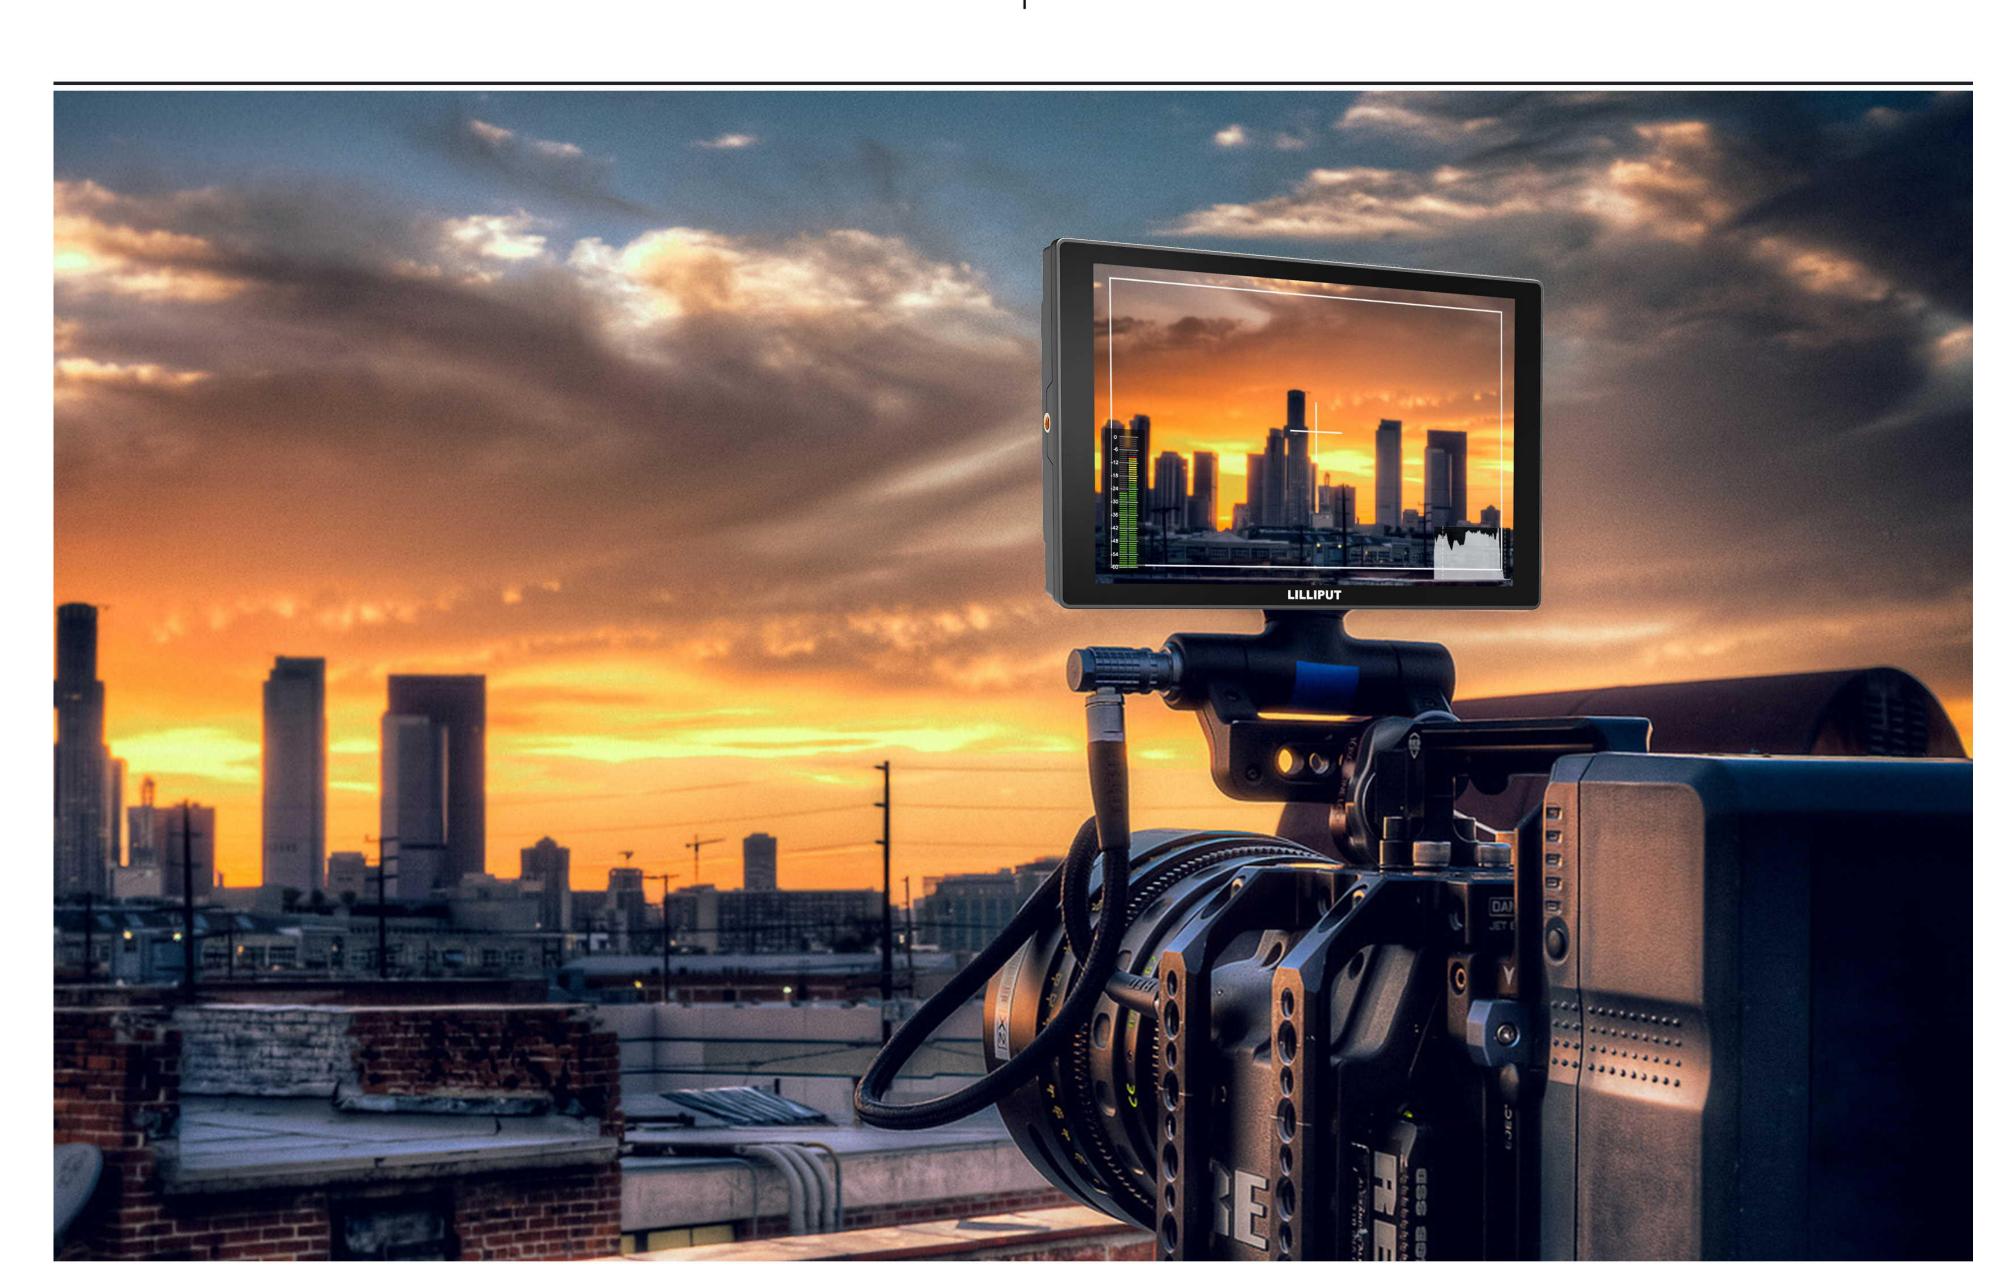

A Better Camera Assist

in better photography experience for variety of applications, i.e. filming on site, broadcast live action, making movies and post-production, etc.


A11, matches with world-famous 4K / FHD camera brands, to assist cameraman

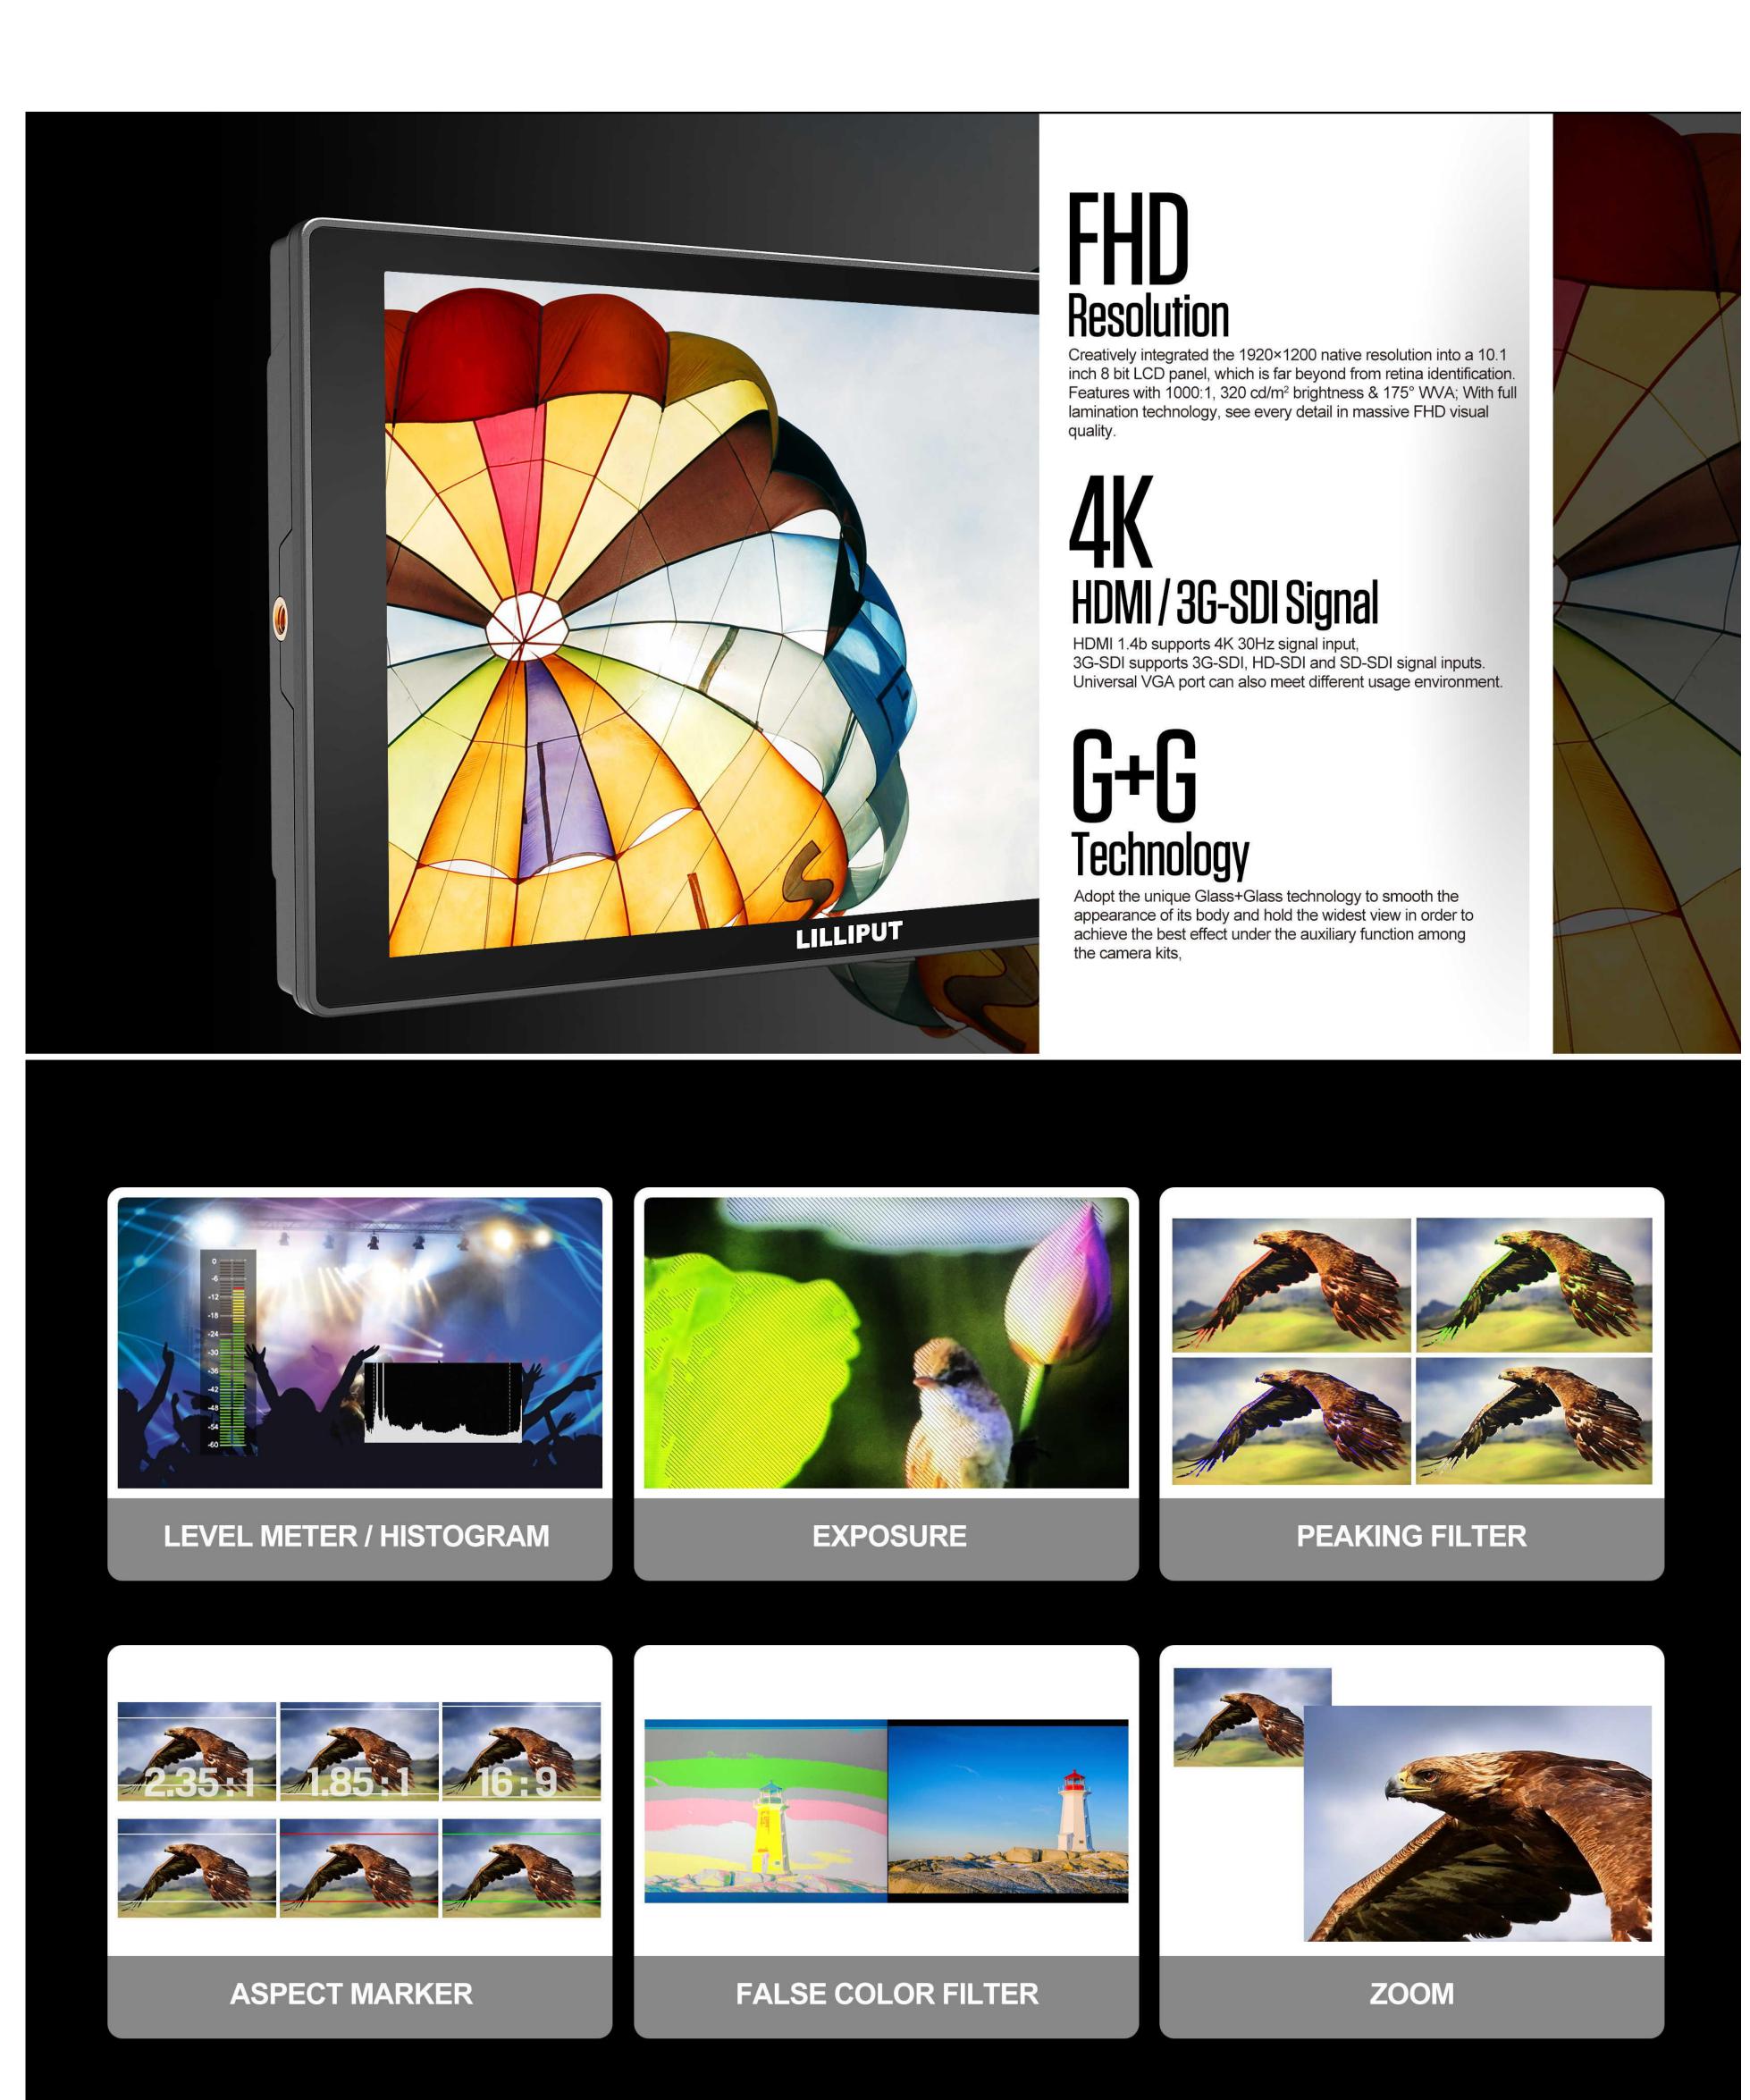

Level meter Histogram Peaking False color Check field Image flip Overscan Underscan Image freeze Aspect ratio Grid Center marker Color temperature Exposure

A11 provides plenty of auxiliary functions for taking photos and making movies, such as peaking, false color and audio level meter.

Camera Auxiliary Functions

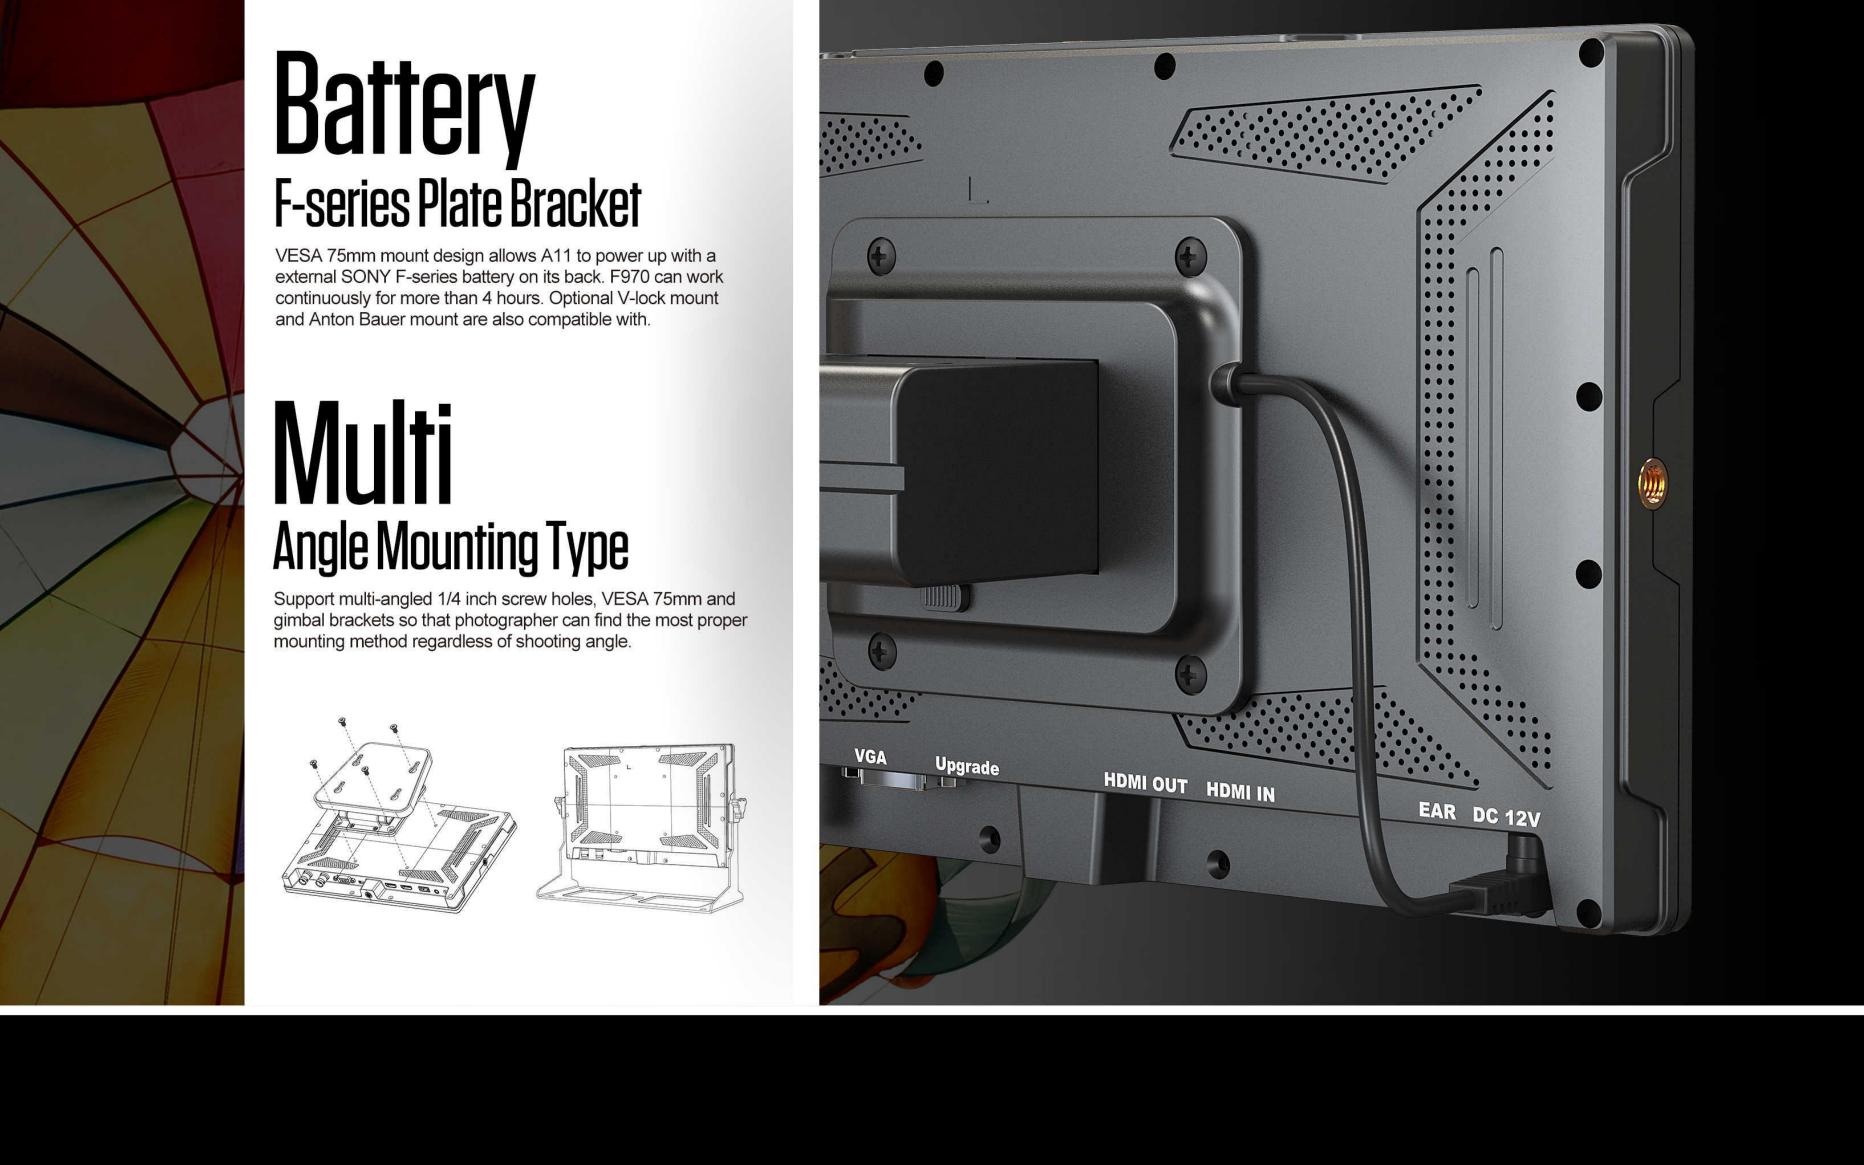



1000:1

1A(12V)

DC 7-24V

≤13W

550g

0℃~50℃

-20℃~60℃

175°/175°(H/V)

1 (upgrade port)

HDMI 1.4b×1 (support 4K 30Hz)

HDMI 1.4b×1 (support 4K 30Hz)

SONY F-series (F550/F750/F970...)

V-mount / Anton Bauer mount(Optional)

252mm × 157mm × 25mm

12V DC Adapter

SunShade

Hot Shoe Mount / Mount Plate Bracket

Gimbal bracket (optional)

HDMI A-C Cable

VESA F970 Battery Plate

VESA 75mm Folding Bracket (optional)

V-mount / Anton Bauer mount (optional)

Note: Due to constant effort to improve products and product features, specifications may change without notice.

Contrast

3G-SDI

Mini USB

3G-SDI loop

Input Voltage

Battery Plate

Power Consumption

Storage Temperature

Dimension(LWD)

Operating Temperature

HDMI

HDMI

Speaker

Ear Jack

Current

Weight

VGA

INPUT

OUTPUT

AUDIO

POWER

ENVIRONMENT

DIMENSION

Viewing Angle