PR⊕A|M Discovery SR-10 Comfortable Shoulder Mount Camera Rig (SR-DVRY-10)

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Front Handle Set



Shoulder plate with Shoulder Pad



Top Quick Release Camera Mount



Lower Quick Dovetail Tripod Plate

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

FUNCTIONS

Threaded Crossbar

- To accessorize the setup.
- It can be adjusted left/right on the NATO standard rail, according to your comfort.


Universal Quick Release Camera Mount

To quickly attach/detach your camera setup

Push Pin

Press to remove Quick Release camera mount from shoulder plate.




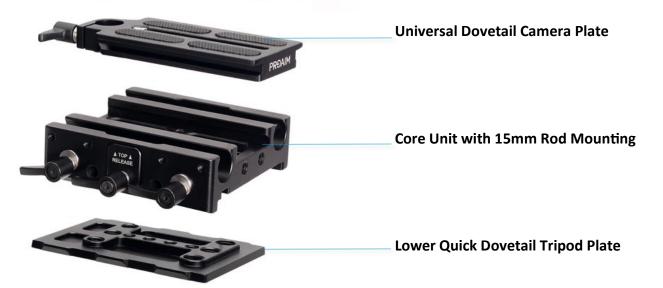


Discovery Rig **Setup**

Adjustment Features


· Loosen the height adjustment knobs to extend the height of the telescopic handle as per your requirement. Tighten the knobs after adjustment.





handles to narrow or widen the handle

positioning, as shown in the image.



• Adjust and fix the plate on the desired position, and tighten the knob.

• Slide the quick release camera mount onto the shoulder mount plate, and tighten it at the needed position.



























• Loosen the knob & remove the universal dovetail camera plate as shown in the image.





 Attach the universal dovetail camera plate to your camera base and tighten it correctly.





 Now mount your camera setup to the quick release camera mount already attached to the shoulder mount plate and tighten the knob to secure, as shown in the image.





• Insert 15mm rods into the core unit, and secure them with the provided knobs.





 If you want to mount your camera setup on a tripod, there is no need to remove the entire setup.

Note: You can remove the Universal dovetail Camera Plate only and leave the Core Unit with your rod pair behind, or you can remove the Core Unit from the Lower Quick Dovetail.





• For mounting the setup on a tripod, you can attach the lower quick dovetail to a tripod plate, as shown in the images.

Note: The Lower Quick Release Dovetail has 1/4"-20 and 3/8"-16 threaded holes for attaching to tripod plates or ARRI standard bridge plates.





• Attach the plates on the Tripod, and slide your camera setup on it.





YOUR PROAIM DISCOVERY SR-10 COMFORTABLE SHOULDER MOUNT CAMERA RIG ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.