

BT-COLORAY 18FCR

B05512

DESCRIPTION

Outdoor projector with 18x8W RGBW leds, 20° beam angle and Neutrik TRUE1 Powercon and 3P XLR connectors and IP-fan cooling

FEATURES

- This stylish 18x8W RGBW projector with a 20° beam angle is a very powerful tool for all kinds of events (stage, TV-show, exhibition boots, architectural lighting,...)
- IP65 rating
- Three different DMX-modes: 4, 6 and 7 channels.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- The LCD-display assures easy navigation in the different setup menus.
- TV-Studio ready: flicker free 1200Hz LED refresh rate.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- White balance adjustment to perfectly match the colors of several projectors.
- Default factory settings + user settings can be saved/loaded.
- 3pin DMX in/outputs and Neutrik® TRUE1 PowerCON® in/outputs for easy daisy chaining.
- Optional modification kit available to modify IP 3pin XLR to 5pin (BT-XLR3TO5 KIT - code: B05523)
- IP-Fan cooling for longer LED life.
- **NOTE: this product has IP65 rating while used for non-permanent outdoor installation and under normal conditions (not exposed to seawater).**





www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2020 by BEGLEC NV. All rights reserved.

TECHNICAL SPECIFICATIONS

General : Application	Architectural, Stage & Rental, Theatre
General : Weight (kg)	5.28
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	123
General : Color	black
General : Display	touchscreen
General : Fixation	optional omega bracket
General : IP rating	outdoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : SMART-DMX	No
Control : Standalone	automatic, fixed
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	7
Light : lamp socket	none
Light : lamp	LED
Light : colors	Red, Green, Blue, White, RGB, RGBW
Light : mix colors	Yes
Light : min. beam angle (°)	20
Light : max. beam angle (°)	20
Light : min. refresh rate (kHz)	1.2
Light : max. refresh rate (kHz)	1.2
Connections : input	3 pin XLR, TRUE1 powerCON, rdm
Connections : output	3 pin XLR, TRUE1 powerCON
Brand	BRITEQ
EANCode	5420025655125

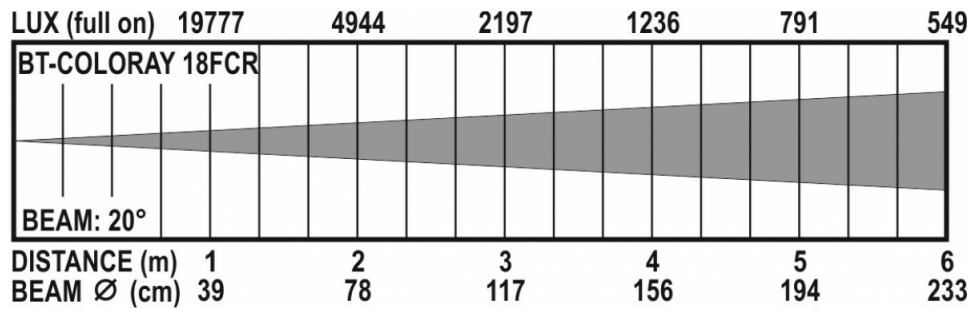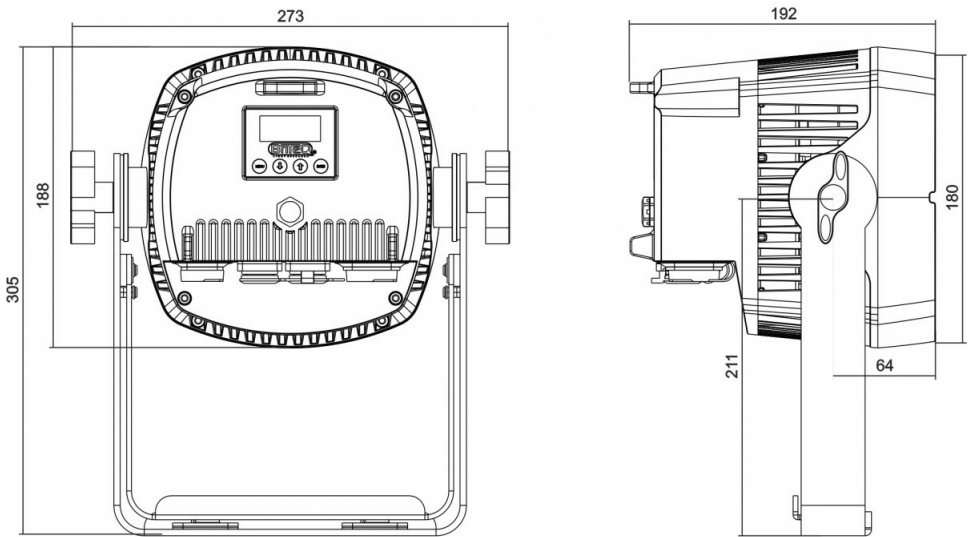

www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2020 by BEGLEC NV. All rights reserved.