



WIRELESS HD MULTIFUNCTIONAL VIDEO TRANSMISSION SYSTEM

MODEL: PRO200

- The product features wireless HD and long distance transmission range which is up to 200m, and supports real-time 1080P video transmission;
- Excellent stability & strong anti-jamming capability under 5GHz frequency band
- Exquisite design; equipped with external SONY F970 battery mechanical interface for battery plug-in; conveniently portable;
- Strong flexibility; support manual frequency setting.



MODEL: PRO200




WIRELESS HD MULTIFUNCTIONAL VIDEO TRANSMISSION SYSTEM


MODEL: PRO200

Mechanical Information

TX: PRO200

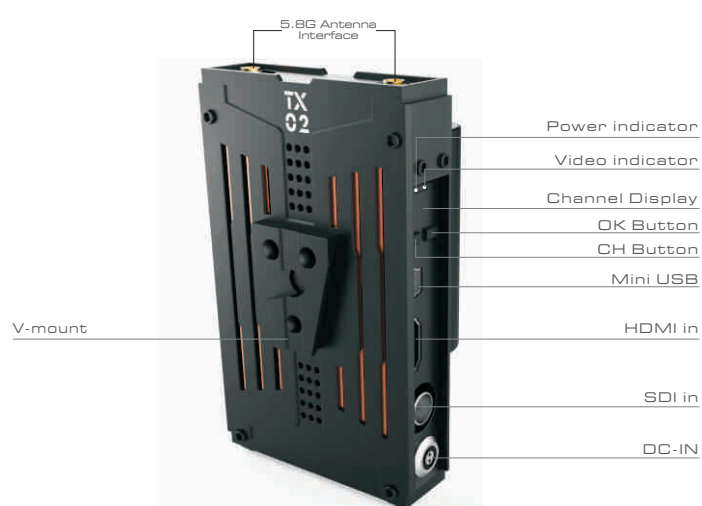

RX: PRO200

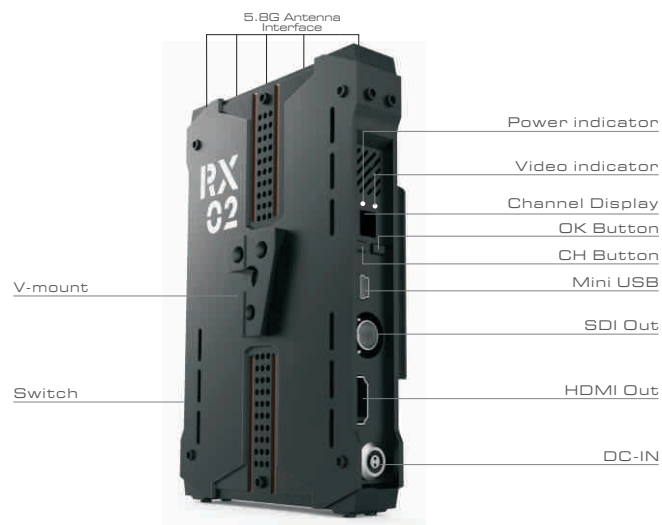

TX: PRO200

Antenna Mode	External antenna
Transmission power	17dBm
Operating Frequency	Free Frequency(EU): 5150~5250MHz, 5725~5825MHz Free Frequency(USA): 5150~5250MHz, 5725~5825MHz Free Frequency(JAP): 5150~5250MHz
Mechanical Interface	1/4 inch nut in bottom, SONY F-Type Battery Plate
Latency	<1 ms
Operating Voltage	DC12V/2A(7V~36V)
Transmission Distance	open environment: up to 200m(3051) External antenna: 5dBi
Power Consumption	8W
Product Size	117.5*72*27.5mm
Audio Format	PCM, DTS-HD, Dolby True HD
Temperature	0~40°C(Working); -20~80°C(Storage)

RX: PRO200

Antenna Mode	External antenna
Waterproof grade	IP54
Operating Frequency	Free Frequency(EU): 5150~5250MHz, 5725~5825MHz Free Frequency(USA): 5150~5250MHz, 5725~5825MHz Free Frequency(JAP): 5150~5250MHz
Mechanical Interface	1/4 inch nut in bottom, SONY F-Type Battery Plate
Latency	<1 ms
Operating Voltage	DC12V/2A(7V~36V)
Transmission Distance	open environment: up to 200m(7051) External antenna: 2dBi
Power Consumption	6W
Product Size	144*95*27.5mm
Audio Format	PCM, DTS-HD, Dolby True HD
Temperature	0~40°C(Working); -20~80°C(Storage)

Application



Film Shooting



Live Sports Events



Remote Monitoring



Live Wedding Broadcasting



Forum Broadcasting



SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD