

C3 Server Settings

Date: Nov 2, 2023 V1.0

1. Login the XUI panel by **http://your server ip:54321** after the bonding server built.

default username: **admin** Password: **Mine123456**

You can change the username and password from the **panel settings - user settings** if needed. [image2]

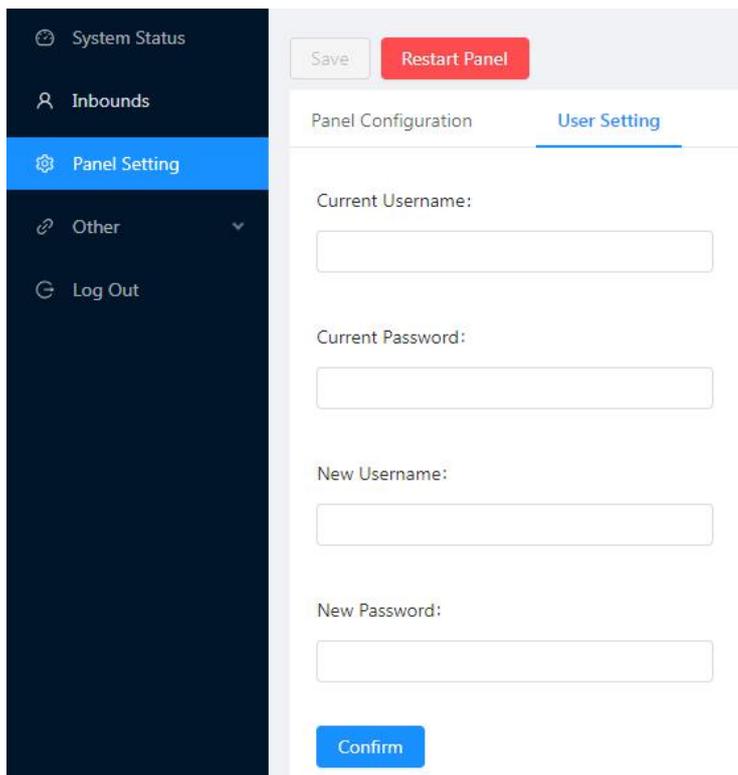
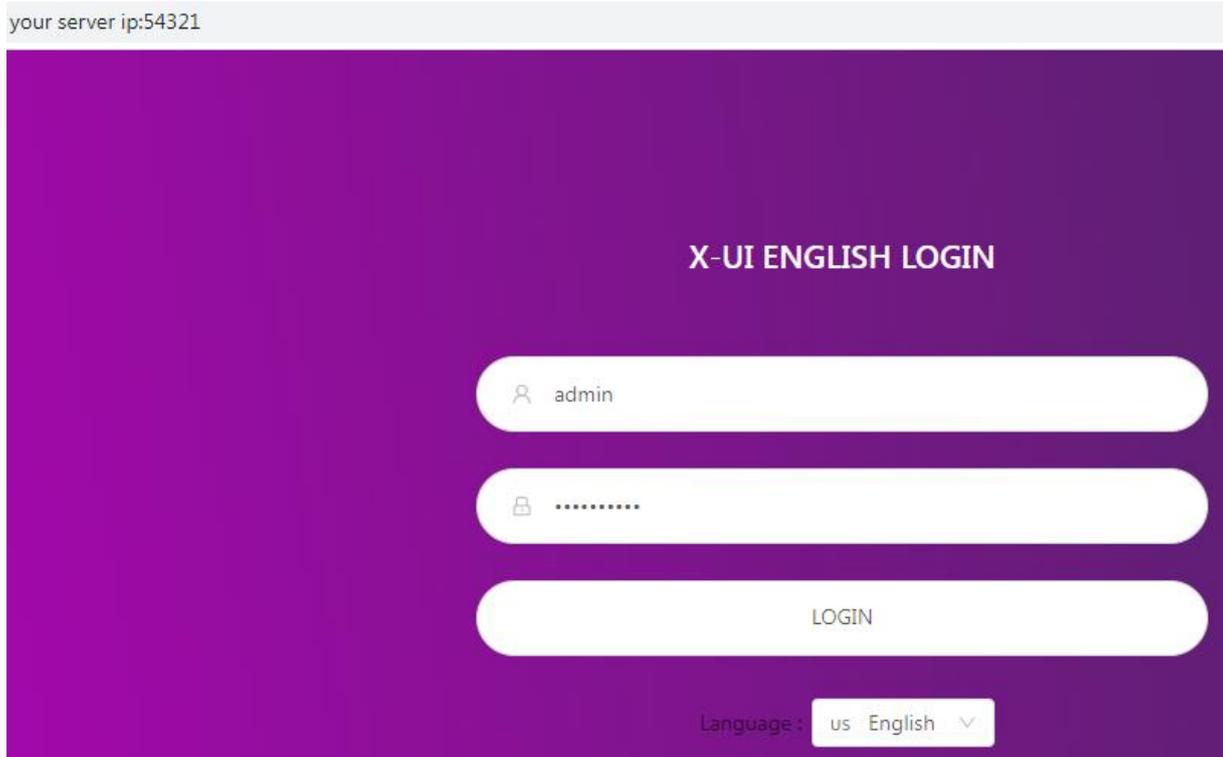


Image 2

2. Select the left "Inbounds" tab and click  to add inbounds for your M4 device.

2.1 for the **Protocol**, select the **vless**.

2.2 In the **Total traffic (GB)** box, 0 means no limit.

2.3 the expire date of the inbound rule.

2.4 **Transmission** select the **ws**

2.5 The port 54322 is used for aggregating traffic. It is recommended to set this port to 54322. Please ensure that the C3 Bonding server port 54322 is opened accordingly. Others keeps them as default, click **[Add to]** to save the Inbounds.

Modify Inbound
✕

Remark: Enable:

Protocol: ▼

Listening IP [?]:

Port: Total Traffic(GB) [?]:

Expiry date [?]: 

> Add Client

fallbacks:

Transmission: ▼



acceptProxyProtocol:

Path: Request header:

TLS:

sniffing [?]:

- By clicking **Check** and **copy link**, then paste it to C3 **Subscribe URL area** (C3 Advance Setting - **Bonding Setting**), and click to Save it

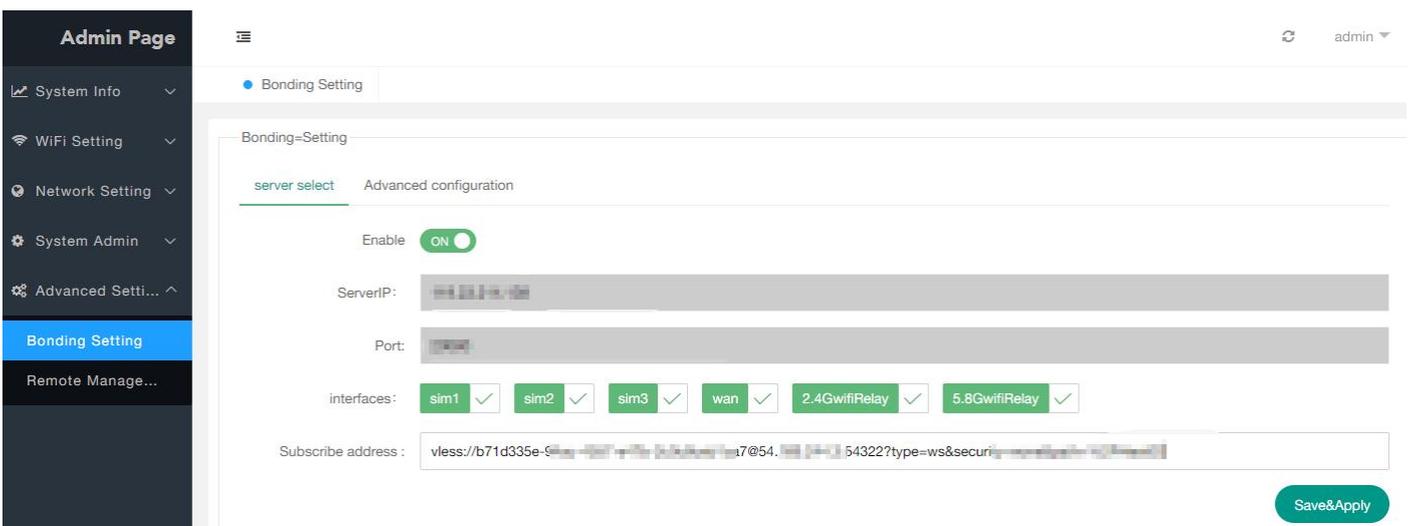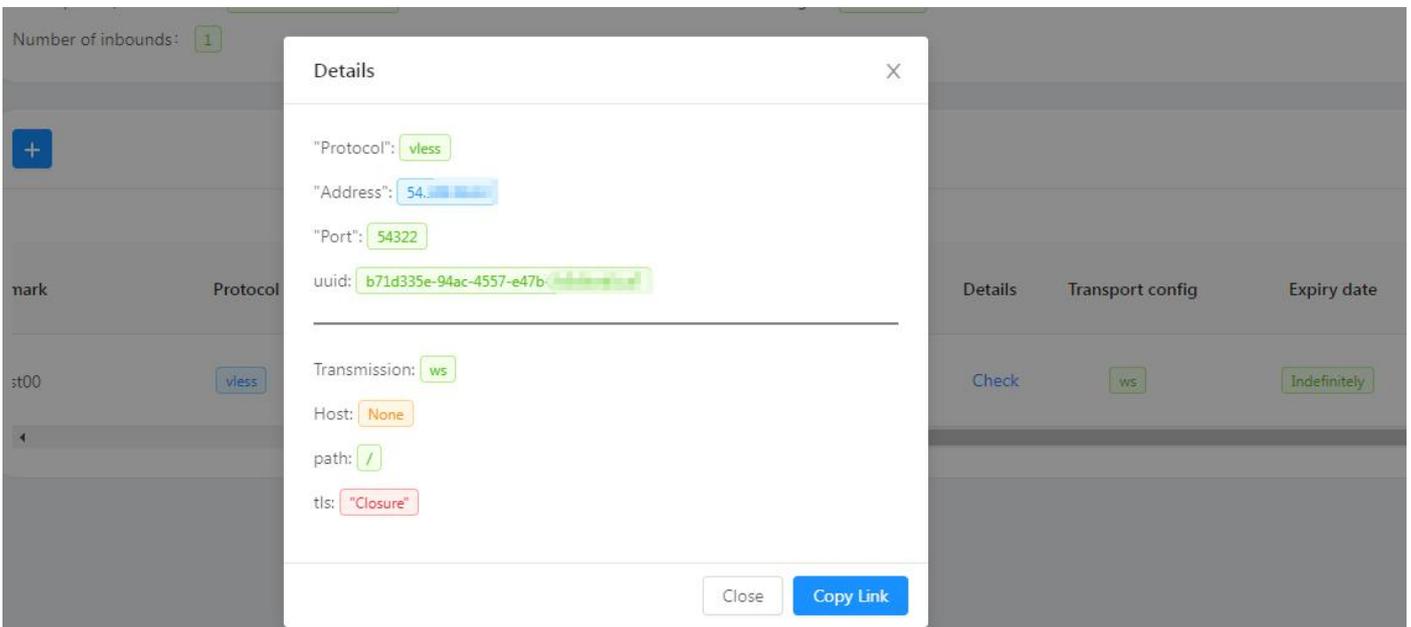

- After waiting for a few seconds, the page will automatically refresh and display the server IP and port.

