

LDP-COLORSTRIP

24FC

05144

DESCRIPTION

Powerful indoor LED projector equipped for typical “wall wash” applications. 96cm long enclosure, equipped with 24pcs 4W RGBW-leds, divided into 4 sections.

FEATURES

- Powerful indoor LED projector equipped for typical “wall wash” applications.
- Fully compatible with the IP65 outdoor LDP-POWERBAR
- Excellent light output and perfect color mixing thanks to 4Watt RGBW LEDs and high quality optics.
- 96cm long enclosure, equipped with 24 leds, divided into 4 sections.
- Elegant, extruded aluminum housing.
- The discretely designed bracket can be easily adjusted in any position.
- The included barndoor hides the LEDs and thus reduces unwanted glare.
- Optimal thermal management for long lifespan and easy maintenance
- Internal power supply and DMX / LED-driver electronics for easy installation.
- IEC-C13/C14 and XLR-3pin input / output connectors allow to link up to 16pcs of LDP-COLORSTRIP 24FC.
- Perfect for use in hotels, clubs, shops, homes, ...
- Excellent built-in programs for wonderful, ever changing, light shows.
- Completely silent operation, thanks to natural convection cooling system.
- Alphanumeric OLED-display and backlit touch keys to select different options of the setup menu.
- Works in standalone, master/slave or can be selected by DMX: fading colors, static colors / chases
- Both models can be daisy chained and used together in master/slave mode.
- Full DMX control with different channel modes: from 3ch up to 20ch (4 sections)
- Adaptable lamp behavior thanks to seamless dimmer speed control.
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure, you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.




www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.



SPECIFICATIONS

General : Application	Architectural
General : Dimensions (cm)	96.1 x 5.6 x 10.1(12.2)
General : Weight (kg)	3.6
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	85
General : Color	white
General : Display	OLED
General : Fixation	M10
General : IP rating	indoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : SMART-DMX	Yes
Control : Standalone	automatic, fixed
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	20
Light : lamp socket	none
Light : lamp	LED
Light : colors	RGBW
Light : mix colors	Yes
Light : iris	No
Light : frost filter	No
Light : min. beam angle (°)	15
Light : max. beam angle (°)	34
Light : min. refresh rate (kHz)	No
Light : max. refresh rate (kHz)	No
Connections : input	3 pin XLR, IEC, rdm
Connections : output	3 pin XLR, IEC, rdm
Brand	BRITEQ
EANCode	5420025651448
Discontinued	No

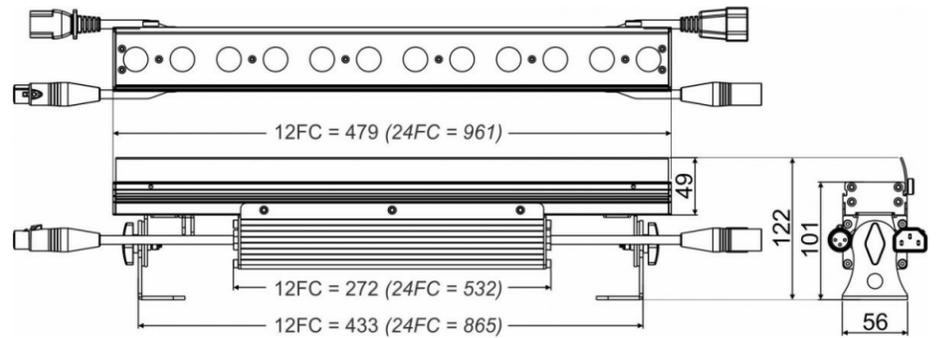

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.