

BT-STROBE 1500

04713

DESCRIPTION

Powerful professional 1500W, 2 channel DMX strobe with high light output.

FEATURES

- Powerful professional 1500W strobe with high light output
- Full DMX-control using 2 channels
 - Flash-speed: from 2flash/sec up to 12flash/sec
 - Light output: from 5% to 100%
- Single, synchronized flashes can be triggered by DMX
- Works also in stand-alone mode: light output + speed controllable on the housing
- Also works audio triggered when the optional CA-8 controller is used.
- XLR 3pin DMX in/outputs
- Automatic "push to reset" fuse
- BT-STR4, a 4channel DMX-remote controller with audio control is optionally available
- Compact and sturdy housing, perfect for rental companies!
- Very easy lamp replacement

This unit is radio-interference suppressed. This product meets the requirements of the current European and national guidelines. Conformity has been established and the relevant statements and documents have been deposited by the manufacturer. This device was designed to produce decorative effect lighting and is used in light show systems.




www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.



SPECIFICATIONS

General : Application	DJ & Club, Stage & Rental, Theatre
General : Dimensions (cm)	45,8 x 14,7 x 11,6cm
General : Weight (kg)	4.22
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	1500
General : Color	black
General : Display	none
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	Yes
Control : Master/Slave	No
Control : DMX M/S	No
Control : Standalone	automatic, sound
Control : Type included remote	-
Control : optional remote	CA-8
Control : programmable	No
Control : upgradable software	No
Control : maximum DMX channels	2
Light : lamp socket	none
Light : Lux	-
Light : lumen	-
Light : lamp	Discharge
Light : min. color temperature (K)	-
Light : max. color temperature (K)	-
Light : CRI	-
Light : colors	White
Light : mix colors	No
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	None
Light : iris	No
Light : prism (# facets + rotating y/n)	-
Light : frost filter	No
Light : min. beam angle (°)	-
Light : max. beam angle (°)	-
Light : min. refresh rate (kHz)	N/A
Light : max. refresh rate (kHz)	N/A
Connections : input	3 pin XLR, jack
Connections : output	3 pin XLR
Brand	BRITEQ
EANCode	5420025647137
Discontinued	No

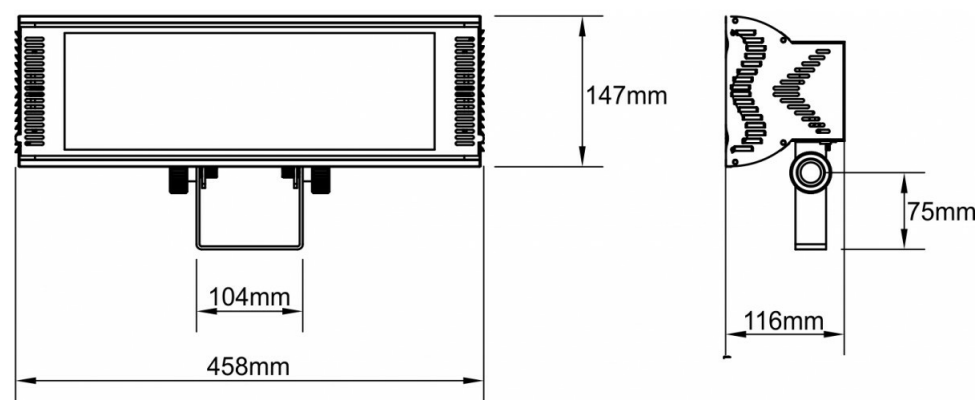

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.